


# OILPATH

## MODEL OP111-A

CETOP 3  
ALLOY SUBPLATE  
SIDE PORT ENTRY

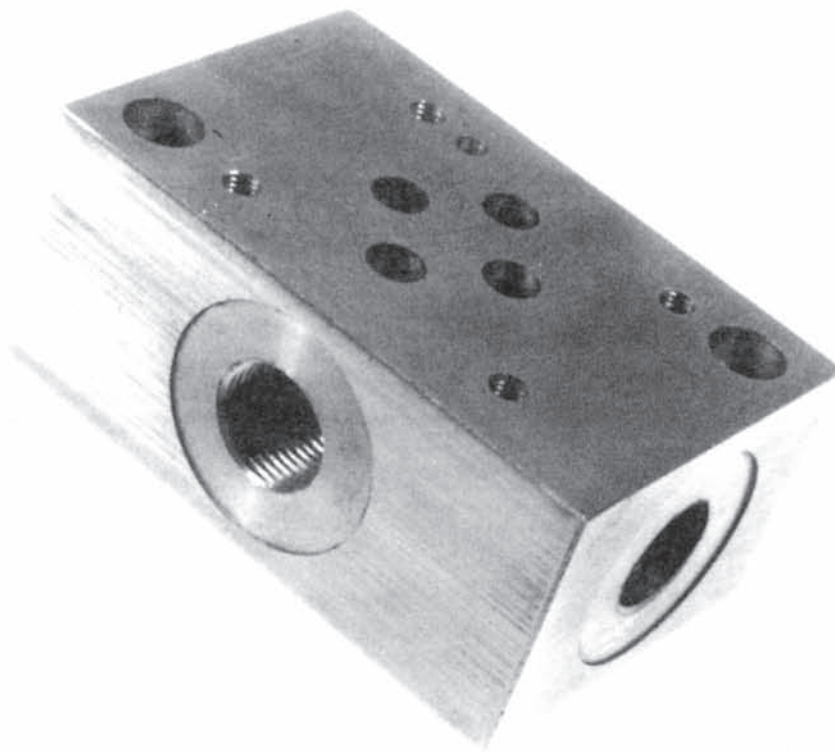


- Manufactured from high grade aluminium alloy.
- Nominal flow 40 ltrs per minute.
- Maximum pressure rating is 245 Bar.
- Cetop 3, (NG6) mounting interface.
- Reduced weight.

## GENERAL DESCRIPTION

The OP111-A alloy subplate which is suitable for Cetop 3 (NG6) valves, has been developed with the criteria of economical cost and compact size as the main consideration. The side porting allows good flexibility for the connection of hoses, and this layout best supports applications in the mobile industry. The subplate has two bolt holes for mounting by 5mm diameter SHCS. The underside of the subplate also has two M5 tapped holes to facilitate mounting from the rear if required.

## SPECIFICATIONS

- Maximum operating pressure is 245 bar.
- Maximum flow is a nominal 40 ltrs per min.
- Manufactured from high grade alloy.
- Pressure, tank and service ports are 3/8" BSPP.
- Mounting surface to CETOP R35H size 3, NG6 and NFPA DO1 standard.

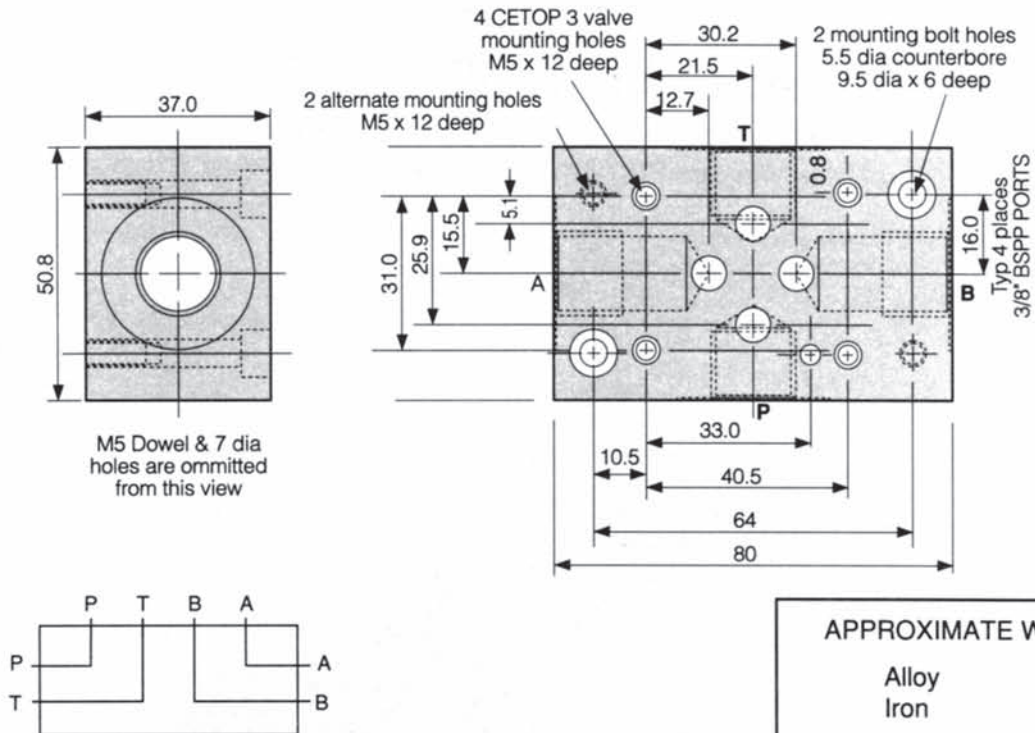

### APPROXIMATE WEIGHT

Alloy	0.35 Kg
Iron	0.60 Kg

## ORDERING CODE

**OP111 - A - C**

Model number

Side entry ports

Used only if cast iron is required instead of aluminum alloy

## DISTRIBUTED BY

Manufactured by :

**OILPATH PTY. LTD.**  
 incorporated in South Australia  
 A.C.N. 007 683 472

21 Deloraine Road,  
 Edwardstown, South Australia.  
 PO Box 132, Edwardstown 5039  
 AUSTRALIA

Ph: (08) 8277 4933 Fax: (08) 8277 9126

## WARRANTY

Oilpath products are warranted to be free of defects in material or workmanship. This warranty voids all other warranties, whether expressed or implied, and shall be in effect for 6 months from date of purchase. The warranty is limited to replacement or repair, excluding seals or damage arising from misuse or incorrect installation. The company accepts no liability for faults caused by improper use or faulty maintenance of the product, or its operation beyond recommended specifications, or contingent or consequential loss or damage under any situation whatsoever. All unauthorised modifications to the product automatically voids the conditions of this warranty.